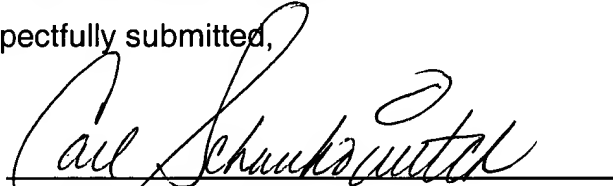


Should additional fees be necessary in connection with the filing of this paper or if a Petition for Extension of Time is required for timely acceptance of the same, the Commissioner is hereby authorized to charge Deposit Account No. 18-0013 for any such fees and Applicant(s) hereby petition for such extension of time.

Respectfully submitted,

Dated: July 8, 2002

By:


Carl Schaukowitch
Reg. No. 239,211

RADER, FISHMAN & GRAUER PLLC
1233 20th Street, N.W. Suite 501
Washington, D.C. 20036
Tel: (202) 955-3750
Fax: (202) 955-3751
Customer No. 23353

Enclosure(s): Appendix I (Marked-Up Version of Amended Claims)

DC094549

APPENDIX I

(MARKED-UP VERSION OF AMENDED CLAIMS)

1. (Amended) A nail-setting claw hammer head, comprising:

a main body disposed along and about a horizontal axis, a vertical axis and a transverse axis which intersect one another perpendicularly at a point of intersection to define a center of mass, the main body having a top surface and a rear surface with the rear surface including a nail-head receiving recess formed therein; and a claw connected to the rear surface of the main body at a first end and forming a fulcrum surface with the top surface, the claw curving about the point of intersection and disposed apart from the rear surface, the claw terminating at a second end opposite the first end with a pair of claw sections defining a V-shaped slot therebetween, the nail-head receiving recess being positioned to face the V-shaped slot ~~and in a plane defined by the horizontal and vertical axes.~~

10. (Amended) A nail-setting claw hammer head for holding a conventional nail having a shank portion and a nail head portion connected to the shank portion, the nail-setting claw hammer head comprising:

a main body disposed along and about a horizontal axis, a vertical axis and a transverse axis which intersect one another perpendicularly at a point of intersection to define a center of mass, the main body having a front surface, a top surface and a rear surface with the rear surface including a nail-head receiving recess formed therein;

impact member connected to and projecting from the front surface, the impact member having a neck and a hammer face; and

a claw connected to the rear surface of the main body at a first end and forming a fulcrum surface with the top surface, the claw curving about the point of intersection and disposed apart from the rear surface, the claw terminating at a second end opposite the first end with a pair of claw sections defining a V-shaped slot

therebetween, the nail-head receiving recess positioned to face the V-shaped slot such that the nail-head receiving recess is sized and adapted to receive the nail head portion of the nail and the V-shaped slot is sized and adapted to receive the shank portion of the nail in order to wedge the shank portion therein, ~~the nail-head receiving recess being in a plane defined by the horizontal and vertical axes.~~